


REVOLUTION PI

RevPi Con M-Bus

Article No.: 100281

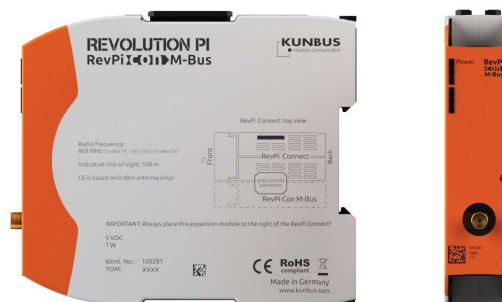

Technical Data

Housing dimensions (H x W x D)	96 x 22.5 x 110.5 mm
Housing type	DIN rail housing (for DIN rail version EN 50022)
Housing material	Polycarbonate
Weight	approx. 115 g
IP Code	IP20
Power supply	power supply via ConBridge
Operating temperature	0 °C....+60 °C
Storage temperature	-40 °C....+70 °C
Humidity (at 40°C)	93% (non-condensing)
Connectors	SMA jack (female)
Optical indicator	1 status LED (green)
M-Bus module	Radiocraft RC1180-MBUS3
Frequency band	868 MHz
Number of radio channels	12
RF data rate	4.8, 32, 100 kbps
RX sensitivity	-106/-102/-101 dBm
Indicative LOS (indicative Line-of-Sight)	max. 500 m
Connection compatibility	Exclusively connectable via ConBridge of RevPi Connect
CE conformity	Yes (only in combination with 0 dBm antenna)
RoHS conformity	Yes
ESD test	Passed (according to EN 61000-4-2)