



Standard Specification Sheet Model: PS90-A6
Plug-in High Performance Arrester for Power Input
(200V AC, up to 2A)

ARRESTANT

OVERVIEW

ARRESTANT is a series of high performance lightning arresters that protect electronic instruments by absorbing surge voltage induced by lightning. To protect the instruments effectively, arresters shall be installed adjacent to instrument to be protected against lines where surge voltage is induced. PS90-A6 is designed to protect 200V AC power input port.

ORDERING INFORMATION

Ordering Code	Standard Price
PS90-A6	OPEN

SPECIFICATIONS

INPUT AND OUTPUT SECTION

Input Signal	200V AC
Output Signal	200V AC

PERFORMANCE

Allowable Current Leakage	Between lines: 1mA or less (at 420V DC)
	Between ground: 1mA or less (at 810V DC)
Instrument Side Voltage Limit	Between lines: 1000V or less (at 10kV, 1.2/50 μs)
	Between ground: 1800V or less (at 10kV, 1.2/50 μs)
Surge Discharge Withstand Capacity	Between lines: 1000A (at 8/20 μs)
	Between ground: 5000A (at 8/20 μs)
Discharge Starting Voltage	Between lines: 420V or more
	Between ground: 810V or more
Maximum Load Current	2A
Temperature	-10~60°C
Humidity	5~90%RH (no condensation)

PHYSICAL

Construction	2 sections construction of main body and terminal base: plug-in + screw fastening
Material	Black, flame resistance ABS resin (Case body) Black, flame resistance ABS resin (Terminal base)
Grounding	JIS Class 3 grounding [100 Ω or less] (with grounding bar)
Mounting Method	Wall mounting with M4 screw


Connection Method	M4 screw terminal connection (fastening torque 1.2 N·m or less)
External Dimension	W23.5×H100×D55mm
Mounting Dimension	90mm
Multi-mounting Pitch	24mm
Weight	Approx. 110g

ADDITIONAL

Adaptor for DIN rail mounting (Specify at ① when ordering)	■ With an adaptor for DIN rail mounting /D
	■ Without an adaptor for DIN rail mounting Blank



TERMIANL ASSIGNMENT

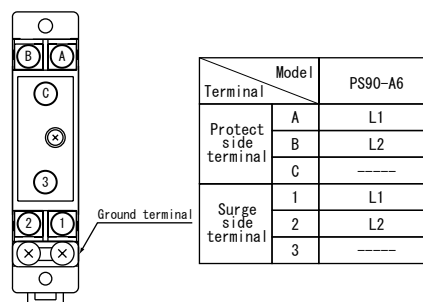

BLOCK DIAGRAM

