

PXI High Density Reed Relay Module

40-140A/141/143

- Highest Density Reed Relay Modules in PXI - Up To 100 Per Module
- SPST, DPST and SPDT Configurations
- High Reliability Pickering Ruthenium Reed Relays For Maximum Performance - Suitable For Low Level Signals
- Fast Operating Speed 250 μ s Typical
- Pin Compatible With Alternative 40-145 Electro-mechanical Relay Modules
- Switch up to 150 V, 1 A with 20 W Max Power
- Single PCB Construction With Leaded Relays Allows Easy Maintenance
- VISA, IVI & Kernel Drivers Supplied for Windows
- Supported by PXI or LXI Chassis
- Supported by **eBIRST™**
- 3 Year Warranty



Choice of Signal Relay Types

40-140A/141/142/143 series modules are fitted with reed relays (sputtered ruthenium type) which are designed solely for high-end instrumentation applications. They offer very long life to 1000 million operations, fast operate time of 0.25 ms and exceptional low level switching performance. Reed relays are hermetically sealed so ensuring consistent and stable contact resistance with long life. All of the reed relays used in our PXI modules are manufactured by our Relay Division: www.pickeringrelay.com

Electro-mechanical Relays (palladium-ruthenium, gold covered) are used in module series 40-145/146/148. They offer good general purpose performance, switching times of 3 ms and are lower cost than instrumentation grade reed relays. Overall they offer a good general purpose choice.

Pin Compatibility. 40-140A & 40-145 series modules are 100% pin compatible (except shielded types) allowing use of either module type in your test system.

Exactly which type to select depends on your application, if in doubt please contact your nearest Pickering sales office.

The 40-140A/141/143 range of high density switching modules are available in Normally Open (SPST & DPST) and changeover (SPDT) configurations. Connections are made via a front panel 200-pin female connector.

General purpose reed relays are suitable for the construction of small switching networks, I/O port switching, for controlling larger relays or for operating external devices such as lamps and solenoids.

Range Description:

- 40-140A 50, 75 or 100 x SPST Reed Relays.
- 40-141 50 x DPST Reed Relays.
- 40-143 48 or 64 x SPDT Reed Relays.


Supported by eBIRST

eBIRST switching system test tools simplify switching system fault-finding by quickly testing the system and graphically identifying the faulty relay. For more information go to: pickeringtest.com/ebirst

High Density 200-pin Connector

We have a range of connector solutions for the 200 pin connector used on this series of modules. These include mating connectors, pre-made cable assemblies and cable assemblies that break out the 200 conductors into more manageable 50-pin transition connectors. Please refer to our web site for more details.

This product is based on the obsolete Molex LFH series connector that has been superseded by a Pickering commissioned form, fit, function equivalent. The new connector series is 100% compatible with the Molex connectors allowing either gender of Pickering connector to mate with the corresponding Molex part without issue.

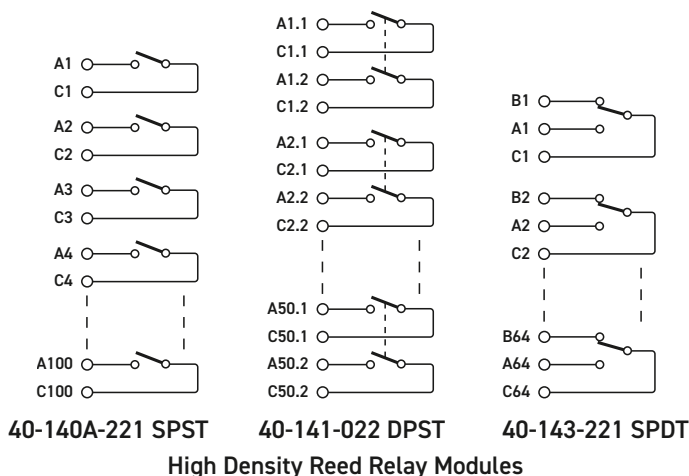

Relay Type

The 40-140A range is fitted with ruthenium sputtered reed relays, these offer very long life with good low level switching performance and excellent contact resistance stability. Spare reed relays are built onto the circuit board to allow easy maintenance with minimum downtime.

All reed relays are manufactured by our Relay Division:
pickeringrelay.com

Switching Specification

Switch Type:	Ruthenium Reed
Max Switching Voltage:	150 VDC/100 VAC*
Max Power:	20 W (SPST & DPST) 3 W (SPDT)
Max Switch Current:	1 A (SPST & DPST) 0.25 A (SPDT)
Max Carry Current:	1 A
Initial On Path Resistance:	<600 mΩ (350 mΩ typical)
Off Path Resistance:	>10 ⁹ Ω
Operate Time:	<0.5 ms, 0.25 ms typical
Release Time:	<0.5 ms, 0.25 ms typical
Expected Life	
Low power load:	1x10 ⁹ operations
Full power load:	>1x10 ⁶ operations

* For full voltage rating, signal sources to be switched must be fully isolated from mains supply and safety earth.

Power Requirements

+3.3 V	+5 V	+12 V	-12 V
0	1400 mA (typ 600 mA)	0	0

RF Specification - In a 50 Ω System (40-143)

Bandwidth (-3 dB):	80 MHz
Crosstalk (typical):	10 kHz: -80 dB 100 kHz: -60 dB 1 MHz: -40 dB 10 MHz: -20 dB
Isolation (typical):	10 kHz: 90 dB 100 kHz: 70 dB 1 MHz: 50 dB 10 MHz: 30 dB

Mechanical Characteristics

Single slot 3U PXI (CompactPCI card).

Module weight: 200g (40-140A-121).

240g (40-140A-221)

200g (40-141-022)

200g (40-143-221)

3D models for all versions in a variety of popular file formats are available on request.

Connectors

PXI bus via 32-bit P1/J1 backplane connector.

Signals via front panel 200-pin female LFH* connector, for pin outs please refer to the operating manual.

* LFH relates to the obsolete Molex connector series and is retained for continuity, products will be fitted with a form, fit, function Pickering equivalent connector that is intermateable with the original Molex parts.

Operating/Storage Conditions

Operating Temperature: 0 °C to +55 °C

Humidity: Up to 90 % non-condensing

Altitude: 5000 m

Storage/Transport Temperature: -20 °C to +75 °C

Humidity: Up to 90 % non-condensing

Altitude: 15000 m

PXI & CompactPCI Compliance

The module is compliant with the PXI Specification 2.2. Local Bus, Trigger Bus and Star Trigger are not implemented.

Uses a 33 MHz 32-bit backplane interface.


Safety & CE Compliance

All modules are fully CE compliant and meet applicable EU directives:

Low-voltage safety EN61010-1:2010,

EMC Immunity EN61326-1:2013,

Emissions EN55011:2009+A1:2010.

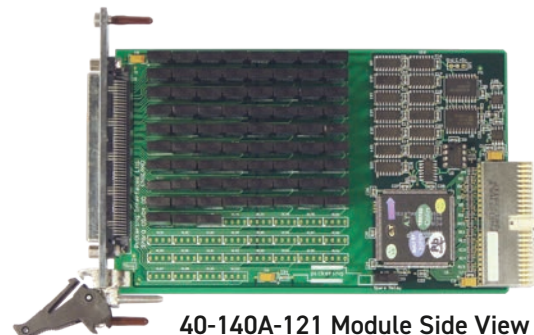

40-140A-121 Module Side View
(75 x SPST Ruthenium Reed Relays)

Product Order Codes

50 x SPST, Ruthenium Reed Relays	40-140A-021
75 x SPST, Ruthenium Reed Relays	40-140A-121
100 x SPST, Ruthenium Reed Relays	40-140A-221
50 x DPST, Ruthenium Reed Relays	40-141-022
48 x SPDT, Reed Relays	40-143-121
64 x SPDT, Reed Relays	40-143-221

Product Customization

Pickering modules are designed and manufactured on our own flexible manufacturing lines, giving complete product control and enabling simple customization to meet very specific requirements.

Customization can include:

- Alternative reed relay types
- Mixture of reed relay types
- Alternative number of relays
- Different performance specifications

All customized products are given a unique part number, fully documented and may be ordered at any time in the future. Please contact your local sales office to discuss.

Support Products

eBIRST Switching System Test Tool

This product is supported by the *eBIRST* test tools which simplify the identification of failed relays, the required *eBIRST* tools are below. For more information go to: pickeringtest.com/ebirst

Product	Test Tool	Adapter
40-140A/141/143	93-002-001	Not Required

Spare Relay Kits

Kits of replacement relays are available for the majority of Pickering's PXI switching products, simplifying servicing and reducing down-time.

Product	Relay Kit
40-140A-021/121/221	91-100-015
40-141-022	91-100-005
40-143-121/221	91-100-025

For further assistance, please contact your local Pickering sales office.

Mating Connectors & Cabling

For connection accessories for the 40-140 series please refer to the [90-002D](#) 200-pin LFH Connector Accessories data sheet where a complete list and documentation can be found for accessories, or refer to the website.



Pickering can supply mating 200-pin connectors and cable assemblies to enable easy integration of the 40-140/141/143 series of relay modules

The 40-140A/141/143 is part of a range of relay modules suitable for general purpose switching applications.

Pickering's Range of PXI & PXIe Low & High Density General Purpose Switching Modules			
Switch Type	Max Switch Voltage	Max Switch/ Carry Current	Model No.
16 or 32 x SPDT	150 VDC/100 VAC	0.25A/1A	40-110
16 or 32 x SPST 16 or 24 x DPST	150 VDC/100 VAC	1A/1.2A	40-115
50, 75 or 100 x SPST	150 VDC/100 VAC	1A	40-140A
50 x DPST	150 VDC/100 VAC	1A	40-141
48 or 64 x SPDT	150 VDC/100 VAC	0.25A/1A	40-143
50, 75 or 100 x SPST (NO or NC)	150 VDC/100 VAC	1A	40/42-145A
25 or 50 x DPST	150 VDC/100 VAC	1A	40/42-146A
32, 48 or 64 x SPDT	150 VDC/100 VAC	1A	40/42-148A



Chassis Compatibility

This PXI module must be used in a suitable chassis. It is compatible with the following chassis types:

- All chassis conforming to the 3U PXI and 3U Compact PCI (cPCI) specification
- Legacy and Hybrid Peripheral slots in a 3U PXI Express (PXIe) chassis
- Pickering Interfaces LXI or LXI/USB Modular Chassis

Chassis Selection Guide

Standard PXI or hybrid PXIe Chassis From Any Vendor:

- Mix our 1000+ PXI switching & simulation modules with any vendor's PXI instrumentation
- Embedded or remote Windows PC control
- Real-time Operating System Support
- High data bandwidths, especially with PXI Express
- Integrated module timing and synchronization



Pickering LXI or LXI/USB Modular Chassis Only accept our PXI Switching & Simulation Modules:

- Choose from 1000+ Pickering PXI Modules
- Ethernet or USB control enables remote operation
- Low-cost control from practically any controller
- LXI provides manual control via Web browsers
- Driverless software support
- Power sequencing immunity
- Ethernet provides chassis/controller voltage isolation
- Independence from Windows operating system



Connectivity Solutions


We provide a full range of supporting cable and connector solutions for all our switching products—20 connector families with **1200+** products. We offer everything from simple mating connectors to complex cables assemblies and terminal blocks. All assemblies are manufactured by Pickering and are guaranteed to mechanically and electrically mate to our modules. These accessories are detailed in Connector Accessories data sheets, where a complete list and documentation can be found for each accessory.



Connectors
& Backshells



Multi-way
Cable Assemblies



RF Cable
Assemblies




Breakouts



Connector
Blocks

We also offer customized cabling and have a free online **Cable Design Tool** that can be used to create custom cable solutions for many applications.

- Fully supported on modern browsers and tablet operating systems.
- Built-in tutorials and videos allow you to get quickly up to speed.
- Store cable assemblies in the Cloud and develop over time.
- Each cable design has a downloadable PDF documentation file detailing all specifications

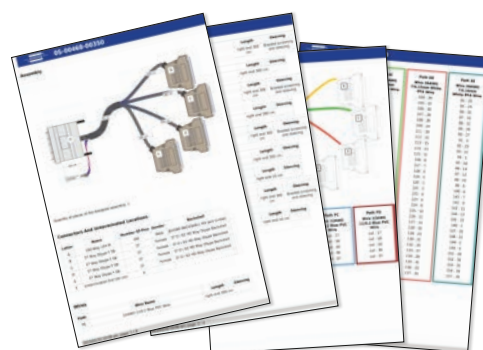

Start designing your custom cabling, go to pickeringtest.com/cdt


Mass Interconnect

We recommend the use of a mass interconnect solution when an Interchangeable Test Adapter (ITA) is required for PXI/LXI based test systems. Our modules are fully supported by Virginia Panel and MacPanel.

Pickering Reed Relays

We are the only switch provider with in-house reed relay manufacturing capability via our Relay Division. These instrument grade reed relays feature **SoftCenter™** technology, ensuring long service life and repeatable contact performance.

To learn more go to pickeringrelay.com

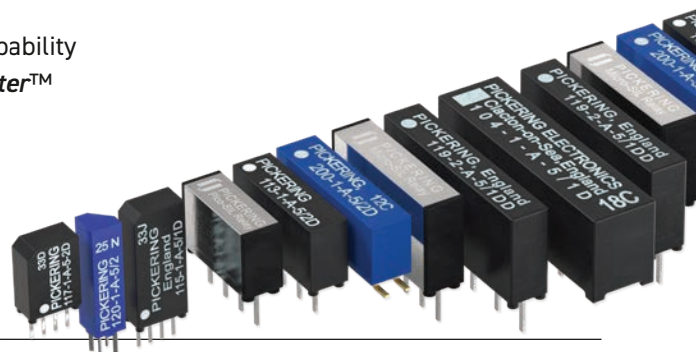

Programming

Pickering provide kernel, IVI and VISA (NI & Keysight) drivers which are compatible with all Microsoft supported versions of Windows and popular older versions.

For more information go to pickeringtest.com/os

The VISA driver support is provided for LabVIEW Real Time Operating Systems (Pharlap and Linux-RT). For other RTOS support contact Pickering. These drivers may be used with a variety of programming environments and applications including:

- **Pickering Interfaces Switch Path Manager**
- **National Instruments** products (LabVIEW, LabWindows/CVI, Switch Executive, MAX, TestStand, VeriStand, etc.)
- **Microsoft Visual Studio** products (Visual Basic, Visual C++)
- **Programming Languages** C, C++, C#, Python
- **Keysight VEE** and **OpenTAP**
- **Mathworks MATLAB, Simulink**
- **Marvin ATEasy**
- **MTQ Testsolutions** Tecap Test & Measurement Suite


Drivers for popular Linux distributions are available, other environments are also supported, please contact Pickering with specific enquiries. We provide Soft Front Panels (SFPs) for our products for familiarity and manual control, as well as comprehensive documentation and example programs to help you develop test routines with ease.

To learn more about software drivers and development environments go to pickeringtest.com/software

Signal Routing Software

Our signal routing software, Switch Path Manager, automatically selects and energizes switch paths through Pickering switching systems. Signal routing is performed by simply defining test system endpoints to be connected together, greatly accelerating Test System software development.

To learn more go to pickeringtest.com/spm

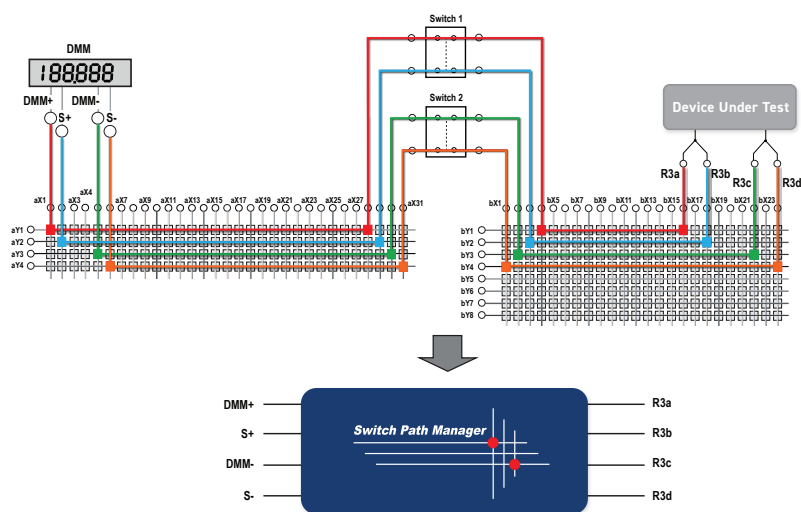

Diagnostic Relay Test Tools

eBIRST Switching System Test Tools are designed specifically for our PXI, PCI or LXI products, these tools simplify switching system fault-finding by quickly testing the system and graphically identifying the faulty relay.

To learn more go to pickeringtest.com/ebirst



Three Year Warranty & Guaranteed Long-Term Support

All standard products manufactured by Pickering Interfaces are warranted against defective materials and workmanship for three years from the date of delivery to the original purchaser. Extended warranty and service agreements are available with various levels for your requirements. Although we offer a 3-year warranty as standard, we also include guaranteed long-term support—with a history of supporting our products for typically 15-20 years.

To learn more go to pickeringtest.com/support

Available Product Resources

We have a library of resources including success stories, product and support videos, articles and white papers as well as application-specific brochures to assist you. We have also published reference books on switching technology and the PXI and LXI standards.

To view, download or request any of our product resources go to pickeringtest.com/resources

