CONTACT THAILAND DISTRIBUTOR - TECHSQUARE CO., LTD.
TEL +666-5559-6050 EMAIL sales@techsquare.co.th SITE www.techsquare.co.th

PXI RTD Simulator Module

40-262

- Choice of 6, 12 or 18 Channels of Accurate RTD Simulation
- PT100 or PT1000 Versions
- Simple Control By Resistance Calls
- High Accuracy and Fine Resistance Control
- Short and Open Circuit Simulation
- Simple Calibration With External DMM
- Drivers Supplied for Windows & Linux, Plus Support for Real-time Systems
- Supported by PXI or LXI Chassis
- 3 Year Warranty




The 40-262 is a PXI module with 6, 12 or 18 channels providing a. cost effective method of simulating PT100 or PT1000 RTDs. The channels also have a short and open circuit setting to simulate faulty wiring to a sensor. The range is as follows:

- 6 Channels, 90 Ω - 250 Ω for PT100 RTDs (1 PXI Slot)
- 6 Channels, 900 Ω - 2500 Ω for PT1000 RTDs (1 PXI Slot)
- 12 Channels, 90 Ω - 250 Ω for PT100 RTDs (2 PXI Slots)
- 12 Channels, 900 Ω - 2500 Ω for PT1000 RTDs (2 PXI Slots)
- 18 Channels, 90 Ω - 250 Ω for PT100 RTDs (2 PXI Slots)
- 18 Channels, 900 Ω - 2500 Ω for PT1000 RTDs (2 PXI Slots)

All versions are suitable for simulating a temperature range of -25 °C to 410 °C for their given sensor type. The use of resistance value calls makes programming simple, an API to convert temperature requests to resistance calls using a model of the sensor being used is also available.

Each channel can operate with a differential input voltage range of greater than ±15 V relative to a defined common mode voltage. The common mode voltage can be set to 0 V, +12 V, -12 V or an external source of up to ±50 V.

The 40-262 provides a convenient system for verifying channel resistance using an external DMM connected to the calibration port. The system allows cascading so one DMM can be used for the verification of multiple modules. Verification can be performed while the UUT is connected to the module.

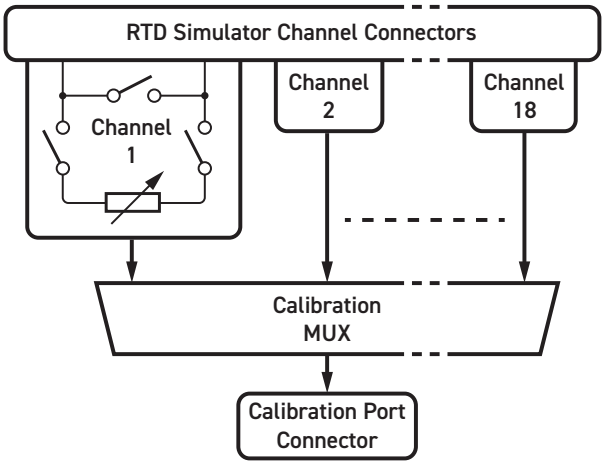


Functional Diagram for the 40-262 RTD Simulator Module

Issue 5.2 November 2024

Specification

Simulation Channels						
	40-262 Builds					
	-001	-201	-101	-002	-202	-102
Simulated Sensor Type	PT100			PT1000		
Number of Channels	18	12	6	18	12	6
Number of PXI Slots	2		1	2		1
Resistance Range	90 Ω to 250 Ω			900 Ω to 2500 Ω		
Resistance Resolution†	<8 mΩ			<90 mΩ		
Simulated Temperature Range	-25 °C to +410 °C					
Simulated Temperature Resolution†	<0.03 °C					
Accuracy‡	0.1 %					

† Continuous resolution, no missing setting.
‡ @ ±10 °C from calibration temperature (factory calibration @ 21 °C).

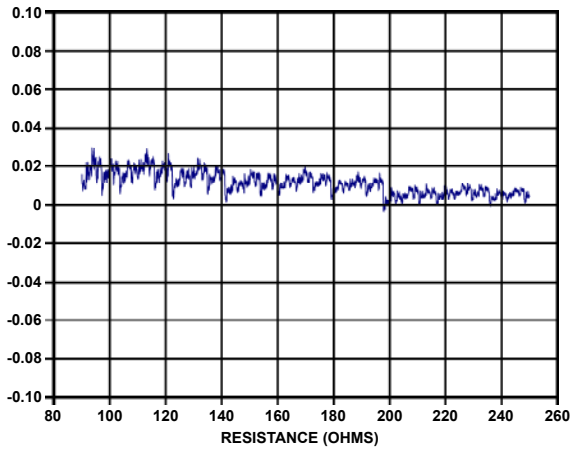

Typical accuracy of 40-262 over the entire resistance range measured at 21 °C

Performance is measured in 10 mΩ increments by making a resistance call (in Ohms) to the module and then measuring the actual resistance with a DMM. Vertical axis shows the reading error as % of the requested value.

The 40-262 uses innovative techniques which are the subject of protected Pickering Interfaces intellectual property rights.

Short Circuit Resistance:	0.1 Ω typical
Open Circuit Setting:	$>10^9$ Ω
Operating Voltage*:	
Common mode voltage	Input voltage range
0 V	-15 V to +15 V
+12 V	-3 V to +27 V
-12 V	-27 V to +3 V
External	External ±15 V
Common mode voltage can be selected by software control. Default value is 0 Volts. Damage level is a differential voltage level of ±18 V wrt common or the maximum power rating, whichever is lower.	
Ext. common mode voltage:	±50 V*
Maximum power:	100 mW
Thermo-electric emf:	<3 µV
Resistance - power off:	Open circuit
Number of operations:	100 million (10 mA)
Operating time:	3 ms typical †

* For full voltage rating, signal sources must be fully isolated from mains supply and safety earth.

† The total operate time when setting a resistance may vary depending upon the change requested due to relay sequencing.

Calibration Port

Function:	Supports 4 terminal measurements of all the channels in the module. Modules can be cascaded together to permit single DMM to support multiple modules with simulation channel connected to UUT.

Software Support

Supplied with software that accepts a resistance instruction.

Power Requirements

+3.3 V	+5 V	+12 V	-12 V
0	0.6 A (40-262-1xx) 1.0 A (40-262-2xx) 1.4 A (40-262-0xx)	10 mA	10 mA

Mechanical Characteristics

3U PXI (CompactPCI card):

- 2 slots for 12 & 18 channel versions.
- 1 slot for 6 channel versions.

3D models for all versions in a variety of popular file formats are available on request.

Connectors

PCI Interface: 33 MHz, 32-bit address, 16 bit data.
Simulation channels via front panel 15-pin male D-Type connector (1 per 6 channels). Calibration connection via front panel 9-pin male D-Type connector. For pin outs refer to the operating manual.

Operating/Storage Conditions

Operating Conditions

Operating Temperature:	0 °C to +55 °C
Humidity:	Up to 90 % non-condensing
Altitude:	5000 m

Storage and Transport Conditions

Storage Temperature:	-20 °C to +75 °C
Humidity:	Up to 90 % non-condensing
Altitude:	15000 m

PXI & CompactPCI Compliance

The module is compliant with the PXI Specification 2.2. Local Bus, Trigger Bus and Star Trigger are not implemented.

Uses a 33MHz 32-bit backplane interface.

Safety & CE Compliance

All modules are fully CE compliant and meet applicable EU directives: Low-voltage safety EN61010-1:2010, EMC Immunity EN61326-1:2013, Emissions EN55011:2009+A1:2010.

Product Order Codes

18ch 90Ω to 250Ω PT100 RTD Simulator	40-262-001
18ch 900Ω to 2500Ω PT1000 RTD Simulator	40-262-002
12ch 90Ω to 250Ω PT100 RTD Simulator	40-262-201
12ch 900Ω to 2500Ω PT1000 RTD Simulator	40-262-202
6ch 90Ω to 250Ω PT100 RTD Simulator	40-262-101
6ch 900Ω to 2500Ω PT1000 RTD Simulator	40-262-102

Accessories:

Calibration port to DMM lead (shrouded 4mm bayonet plug):

For a single module (1x9 pin D-type)	40-975-009-SL1
For two modules (2x9 pin D-types)	40-975-009-SL2
For three modules (3x9 pin D-types)	40-975-009-SL3

(calibration leads capable of supporting a greater number of modules are available, please contact sales office)

Other Resistor Modules

Pickering Interfaces manufacture a range of variable resistor modules in the PXI format. If you have a requirement for a variable resistor module please contact your local sales office with the information below and we will advise you on the best solution for your application.

Lowest Resistance †	
Highest Resistance	
Resistance Resolution	
Overall Accuracy	
Maximum Power/Current	
Number of Channels (variable resistors)	

† Resistance is as measured across the user connector terminals, minimum resistance must have a non-zero value.

Other RTD Sensors

If you need to simulate other RTD devices please contact the local sales office or Pickering Interfaces direct with information on the RTD type and resistance or temperature range you need to cover.

Product Customization

Pickering PXI modules are designed and manufactured on our own flexible manufacturing lines, giving complete product control and enabling simple customization to meet very specific requirements.

Customization can include:

- Alternative resistance range
- Alternative resolution
- Different number of channels
- Different performance specifications

All customized products are given a unique part number, fully documented and may be ordered at any time in the future. Please contact your local sales office to discuss.


Mating Connectors & Cabling

For connection accessories for the 40-262 please refer to the 90-010D 15-pin D-Type and 90-003D 9-pin D-Type Connector Accessories data sheets where a complete list and documentation can be found for accessories, or refer to the website.

The 40-262 is part of a range of Precision Resistor Modules suitable for simulation applications.

For applications that do not require the precision or accuracy of our precision range, look to our PXI Standard Resistor range which includes models 40-280, 40-281, 40-282, 40-290, 40-291, 40-292, 40-293, 40-294, 40-295 and 40-296.

Pickering's Range of Precision Resistor Modules				
Resistor Type	Channels	Range	Resolution	Model No.
Precision	3	90 Ω to 8 kΩ	<10 mΩ	40-260
Precision	2	1.5 Ω to 2.9 kΩ or 10 Ω to 36 kΩ	<2 mΩ or <15 mΩ	40-261
RTD Simulator	18, 12 or 6	90 Ω to 250 Ω or 900 Ω to 2500 Ω	<8 mΩ or <90 mΩ	40-262
RTD Simulator	24, 20, 16, 12, 8 or 4	40 Ω to 900 Ω, 200 Ω to 4.5 kΩ or 400 Ω to 9 kΩ	<10 mΩ, <50 mΩ or <100 mΩ	40-263
Strain Gauge Simulator	6, 4 or 2	350 Ω, 1 kΩ, 1.5 kΩ, 2 kΩ or 3 kΩ	<2 mΩ, <10 mΩ, <12.5 mΩ, <20 mΩ or <25 mΩ	40-265
High Density Precision	18, 9, 6, 4 or 3	Up to 85.3 MΩ	0.125 Ω, 0.25 Ω, 0.5 Ω, 1 Ω, 2 Ω, 4 Ω or 8 Ω	40/42-297A
High Density Precision	18, 9, 6, 4 or 3	Up to 22.3 MΩ	0.125 Ω, 0.25 Ω, 0.5 Ω, 1 Ω or 2 Ω	40-298

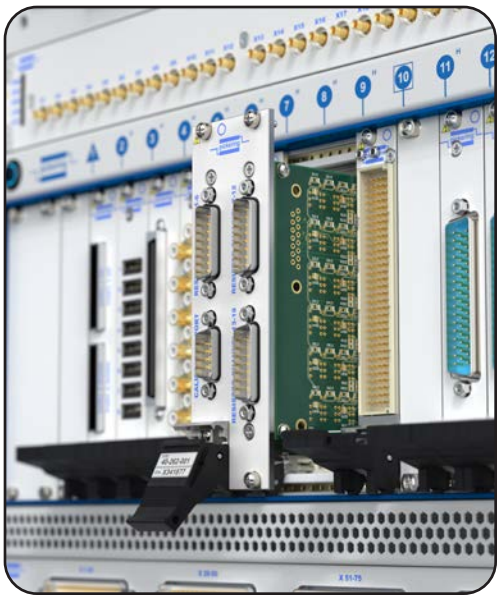



Chassis Compatibility

This PXI module must be used in a suitable chassis. It is compatible with the following chassis types:

- All chassis conforming to the 3U PXI and 3U Compact PCI (cPCI) specification
- Legacy and Hybrid Peripheral slots in a 3U PXI Express (PXIe) chassis
- Pickering Interfaces LXI or LXI/USB Modular Chassis

Chassis Selection Guide

Standard PXI or hybrid PXIe Chassis From Any Vendor:

- Mix our 1000+ PXI switching & simulation modules with any vendor's PXI instrumentation
- Embedded or remote Windows PC control
- Real-time Operating System Support
- High data bandwidths, especially with PXI Express
- Integrated module timing and synchronization



Pickering LXI or LXI/USB Modular Chassis
Only accept our PXI Switching & Simulation Modules:

- Choose from 1000+ Pickering PXI Modules
- Ethernet or USB control enables remote operation
- Low-cost control from practically any controller
- LXI provides manual control via Web browsers
- Driverless software support
- Power sequencing immunity
- Ethernet provides chassis/controller voltage isolation
- Independence from Windows operating system



Connectivity Solutions

We provide a full range of supporting cable and connector solutions for all our switching products—20 connector families with **1200+** products. We offer everything from simple mating connectors to complex cables assemblies and terminal blocks. All assemblies are manufactured by Pickering and are guaranteed to mechanically and electrically mate to our modules. These accessories are detailed in Connector Accessories data sheets, where a complete list and documentation can be found for each accessory.





Connectors & Backshells



Multi-way Cable Assemblies



RF Cable Assemblies



Breakouts




Connector Blocks

We also offer customized cabling and have a free online **Cable Design Tool** that can be used to create custom cable solutions for many applications.

- Fully supported on modern browsers and tablet operating systems.
- Built-in tutorials and videos allow you to get quickly up to speed.
- Store cable assemblies in the Cloud and develop over time.
- Each cable design has a downloadable PDF documentation file detailing all specifications

Start designing your custom cabling, go to pickeringtest.com/cdt

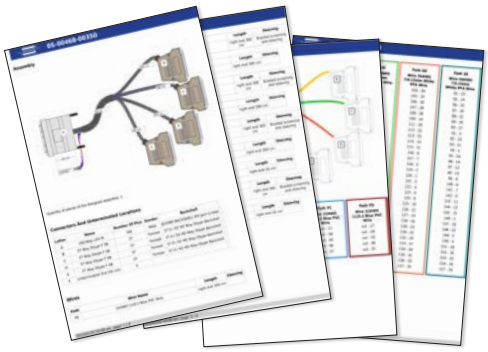


Mass Interconnect

We recommend the use of a mass interconnect solution when an Interchangeable Test Adapter (ITA) is required for PXI/LXI based test systems. Our modules are fully supported by Virginia Panel and MacPanel.

Pickering Reed Relays

We are the only switch provider with in-house reed relay manufacturing capability via our Relay Division. These instrument grade reed relays feature ***SoftCenter***™ technology, ensuring long service life and repeatable contact performance.

To learn more go to pickeringrelay.com

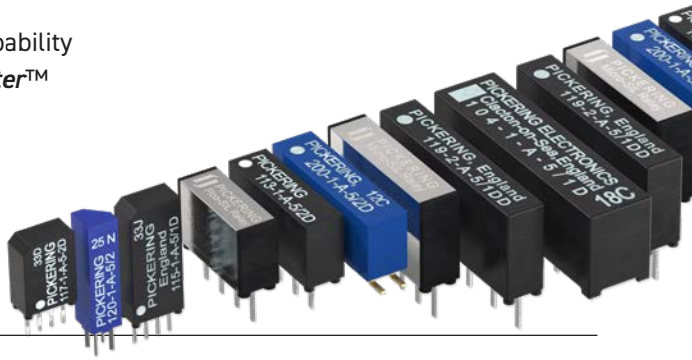

Programming

Pickering provide kernel, IVI and VISA (NI & Keysight) drivers which are compatible with all Microsoft supported versions of Windows and popular older versions.

For more information go to pickeringtest.com/os

The VISA driver support is provided for LabVIEW Real Time Operating Systems (Pharlap and Linux-RT). For other RTOS support contact Pickering. These drivers may be used with a variety of programming environments and applications including:

- **Pickering Interfaces Switch Path Manager**
- **National Instruments** products (LabVIEW, LabWindows/CVI, Switch Executive, MAX, TestStand, VeriStand, etc.)
- **Microsoft Visual Studio** products (Visual Basic, Visual C++)
- **Programming Languages** C, C++, C#, Python
- **Keysight** VEE and OpenTAP
- **Mathworks MATLAB, Simulink**
- **Marvin** ATEasy
- **MTQ Testsolutions** Tecap Test & Measurement Suite


Drivers for popular Linux distributions are available, other environments are also supported, please contact Pickering with specific enquiries. We provide Soft Front Panels (SFPs) for our products for familiarity and manual control, as well as comprehensive documentation and example programs to help you develop test routines with ease.

To learn more about software drivers and development environments go to pickeringtest.com/software

Signal Routing Software

Our signal routing software, Switch Path Manager, automatically selects and energizes switch paths through Pickering switching systems. Signal routing is performed by simply defining test system endpoints to be connected together, greatly accelerating Test System software development.

To learn more go to pickeringtest.com/spm

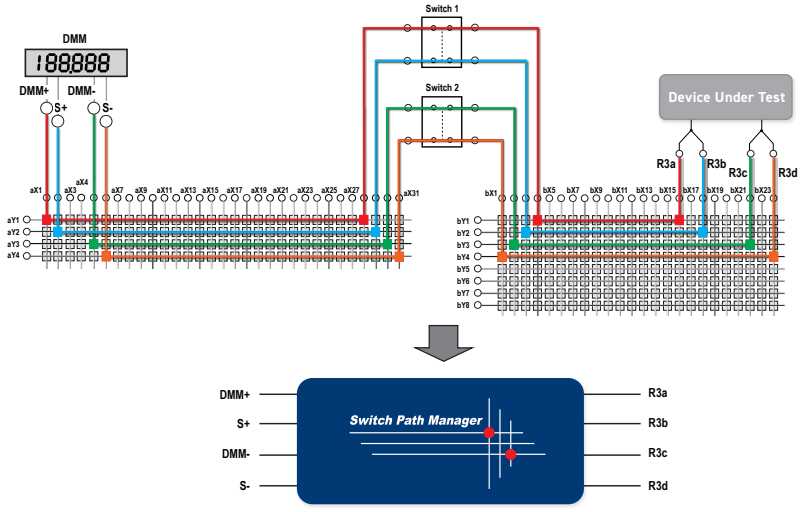

Diagnostic Relay Test Tools

eBIRST Switching System Test Tools are designed specifically for our PXI, PCI or LXI products, these tools simplify switching system fault-finding by quickly testing the system and graphically identifying the faulty relay.

To learn more go to pickeringtest.com/ebirst



Three Year Warranty & Guaranteed Long-Term Support

All standard products manufactured by Pickering Interfaces are warranted against defective materials and workmanship for three years from the date of delivery to the original purchaser. Extended warranty and service agreements are available with various levels for your requirements. Although we offer a 3-year warranty as standard, we also include guaranteed long-term support—with a history of supporting our products for typically 15-20 years.

To learn more go to pickeringtest.com/support

Available Product Resources

We have a library of resources including success stories, product and support videos, articles and white papers as well as application-specific brochures to assist you. We have also published reference books on switching technology and the PXI and LXI standards.

To view, download or request any of our product resources go to pickeringtest.com/resources



© Copyright (2025) Pickering Interfaces. All Rights Reserved
Pickering Interfaces maintains a commitment to continuous product development, consequently we reserve the right to vary from the description given in this data sheet.