


- Available as a PXI or PXIe Module
- High Voltage Programmable Resistor with Maximum Voltage Handling up to 1.2 kV
- Up To 4 Channels in a One Slot Module
- Resistance Resolution to 0.125 Ω
- Values From 2.5 Ω to 76.8 M Ω
- Short and Open Simulation
- Hardware Interlock Provided
- Simple Software Control Through Resistance Calls
- Drivers Supplied for Windows & Linux, Plus Support for Real-time Systems
- PXI Versions Supported by PXI or LXI Chassis
- 3 Year Warranty

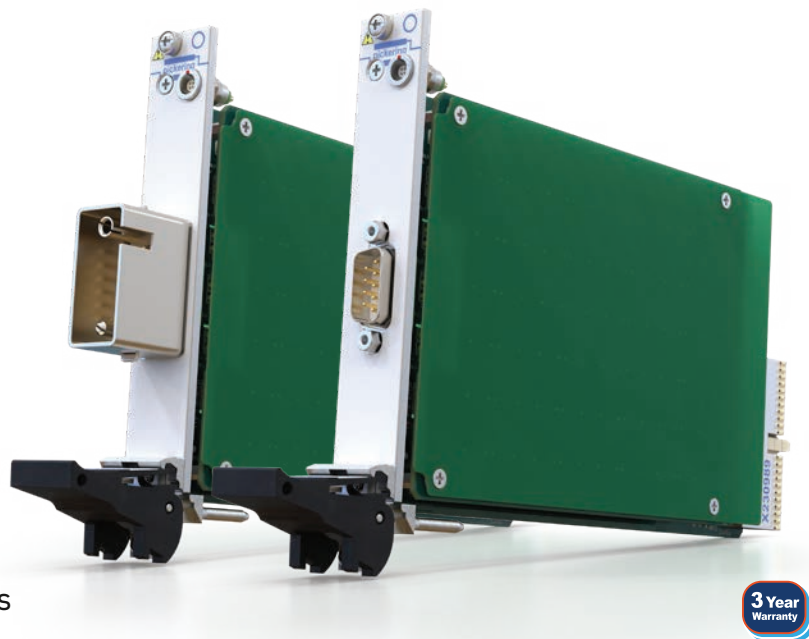

The 40-230 (PXI) and 42-230 (PXIe) are part of a growing range of resistor modules with a selection of power and voltage ratings. The 40/42-230 provides a simple solution for applications requiring voltage handling up to 1.2 kV (REDEL connector versions) or 1 kV (D-type connector versions). It is available in a variety of resistance ranges and resolutions that meet the needs of most functional test systems.

Each channel of the 40/42-230 is able to simulate short circuit and open circuit conditions that can be experienced in a system caused by faulty wiring or sensors.


Software control is simplified by the use of resistor value calls. The module works out the resistance setting closest to the requested value and sets that value. The user can interrogate the module to find the actual setting used.

A calibration cable assembly can be attached to the module in place of the UUT to enable a DMM to be used for verifying the resistor channels. This considerably simplifies the checking of the module's calibration.

The 40/42-230 is available in 70 standard builds that suit the most common configurations:

- Narrow resistance range version, available in 2 or 4 channel variants.
- Medium resistance range version, available in 1 or 2 channel variants.
- Wide resistance range version, available in 1 channel variants.

For applications requiring greater density with lower voltage, users should consider the 40/42-297A High Density Precision Resistor Modules.

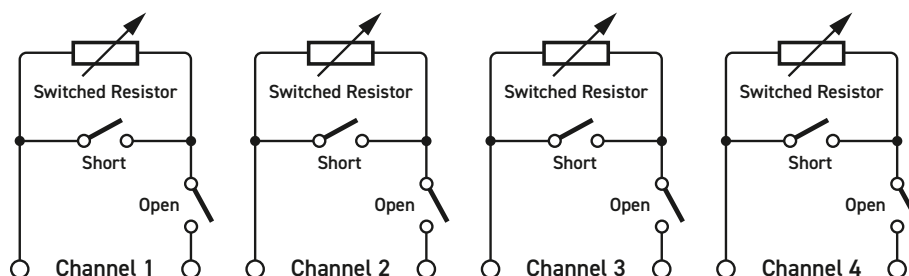


Functional Diagram for the 40/42-230 High Voltage Programmable Resistor Module - Available with 1, 2 or 4 Channels


Pickering's Range of PXI/PXIe Resistor Modules			
Model No.	Description	Channels	Range
40/42-230	High Voltage Programmable Resistor	1, 2, or 4	Up to 76.8 MΩ
40-251	2.5W Programmable Resistor	1, 2, 4 or 8	Up to 22 MΩ
40-252	5W Programmable Resistor	1, 2, or 4	Up to 22 MΩ
40-253	10W Programmable Resistor	1 or 2	Up to 102 kΩ
40-254	15W Programmable Resistor	1 or 2	Up to 395 kΩ
40-280/1/2	Selectable	12 to 48	User Specified
40-290	Programmable Resistor	2	0.5 Ω to 32 kΩ
40-291		4	0.5 Ω to 128 Ω
40-292	Programmable Load	1	40 Ω to 295 Ω or 10 Ω to 2.56 kΩ
40-293	Programmable Resistor + SPDT	2 or 4	Up to 131 kΩ
40-294	Programmable Resistor + SPST	2 or 4	Up to 131 kΩ
40-295	Programmable Resistor	3, 6, 5, 10 or 18	Up to 16 MΩ
40-296	Programmable Potentiometer	1, 2, 3, 4, 5 or 9	Up to 16 MΩ
40/42-297A	High Density Precision Resistor	3, 4, 6, 9 or 18	Up to 85.3 MΩ
40-298			Up to 22.3 MΩ
Precision Resistor Modules			
For applications requiring a Resistor Module with greater resolution (to <2mΩ) or better accuracy (to <0.03%), look to our Precision Resistor range which includes models 40-260, 40-261, 40-262, 40-265, and 40/42-297A			
Custom Resistor Modules			
If our range of Resistor Modules does not meet your specific requirements, please contact you local sales office to discuss your application. Customizations include: different start and stop values, current, power, voltage, precision, accuracy, number of channels, connector etc.			

Hardware Interlock

The 40/42-230 modules are fitted with a hardware interlock. The interlock, when activated, will return all relays to their default unpowered state (assuming the switches are fully functional) and also provide error notification via the software interface. The interlock feature can be daisy-chained between additional hardware interlock enabled modules for example to allow one signal to disable multiple cards. For further details please refer to the Hardware Interlock section within the user manual.

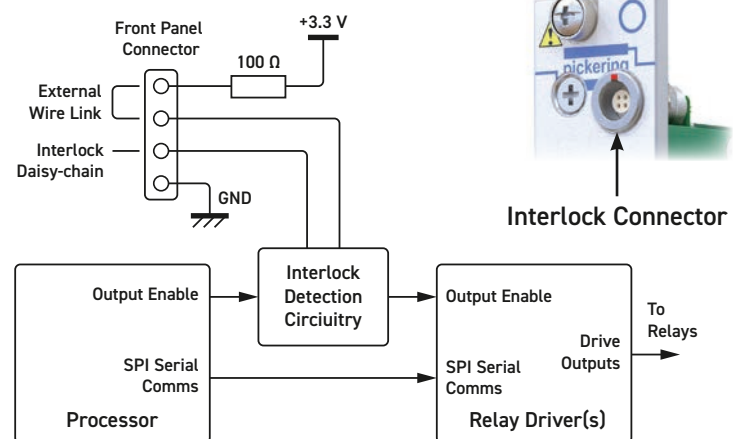

Interlock Signal Routing Diagram for 40/42-230

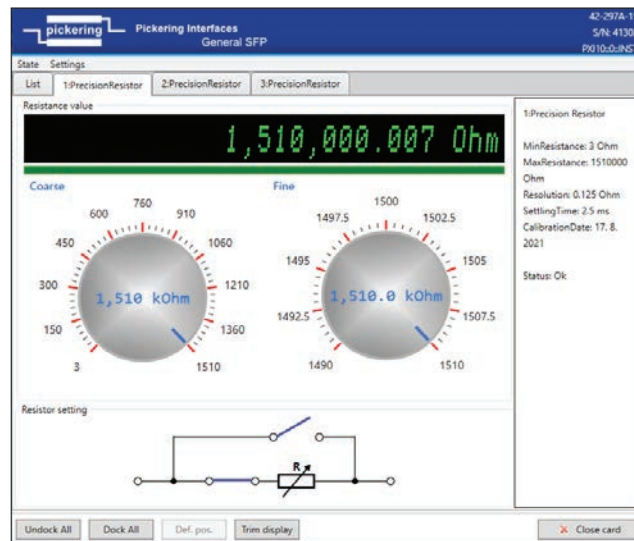

Soft Front Panel for Programmable Resistor Modules

PXI/PXIe Part Number (Number of Channels)	Resistance Range										Resolution
	1Ω	10Ω	100Ω	1kΩ	10kΩ	100kΩ	1MΩ	10MΩ	100MΩ		
40/42-230-010-HI-CC (4)										0.125 Ω	
40/42-230-011-HI-CC (4)										0.25 Ω	
40/42-230-012-HI-CC (4)										0.5 Ω	
40/42-230-013-HI-CC (4)										1 Ω	
40/42-230-014-HI-CC (4)										2 Ω	
40/42-230-015-HI-CC (4)										4 Ω	
40/42-230-016-HI-CC (4)										8 Ω	
40/42-230-020-HI-CC (4)										0.125 Ω	
40/42-230-021-HI-CC (4)										0.25 Ω	
40/42-230-022-HI-CC (4)										0.5 Ω	
40/42-230-023-HI-CC (4)										1 Ω	
40/42-230-024-HI-CC (4)										2 Ω	
40/42-230-025-HI-CC (4)										4 Ω	
40/42-230-026-HI-CC (4)										8 Ω	
40/42-230-030-HI-CC (2)										0.125 Ω	
40/42-230-031-HI-CC (2)										0.25 Ω	
40/42-230-032-HI-CC (2)										0.5 Ω	
40/42-230-033-HI-CC (2)										1 Ω	
40/42-230-034-HI-CC (2)										2 Ω	
40/42-230-035-HI-CC (2)										4 Ω	
40/42-230-036-HI-CC (2)										8 Ω	
40/42-230-040-HI-CC (2)										0.125 Ω	
40/42-230-041-HI-CC (2)										0.25 Ω	
40/42-230-042-HI-CC (2)										0.5 Ω	
40/42-230-043-HI-CC (2)										1 Ω	
40/42-230-044-HI-CC (2)										2 Ω	
40/42-230-045-HI-CC (2)										4 Ω	
40/42-230-046-HI-CC (2)										8 Ω	
40/42-230-050-HI-CC (2)										0.125 Ω	
40/42-230-051-HI-CC (2)										0.25 Ω	
40/42-230-052-HI-CC (2)										0.5 Ω	
40/42-230-053-HI-CC (2)										1 Ω	
40/42-230-054-HI-CC (2)										2 Ω	
40/42-230-055-HI-CC (2)										4 Ω	
40/42-230-056-HI-CC (2)										8 Ω	


40/42-230 High Voltage Resistor Module Range - 1 kV versions with 9-pin D-type connector

PXI/PXIe Part Number (Number of Channels)	Resistance Range										Resolution
	1Ω	10Ω	100Ω	1kΩ	10kΩ	100kΩ	1MΩ	10MΩ	100MΩ		
40/42-230-210-HI (4) 40/42-230-310-HI (2)										0.125 Ω	
40/42-230-211-HI (4) 40/42-230-311-HI (2)										0.25 Ω	
40/42-230-212-HI (4) 40/42-230-312-HI (2)										0.5 Ω	
40/42-230-213-HI (4) 40/42-230-313-HI (2)										1 Ω	
40/42-230-214-HI (4) 40/42-230-314-HI (2)										2 Ω	
40/42-230-215-HI (4) 40/42-230-315-HI (2)										4 Ω	
40/42-230-216-HI (4) 40/42-230-316-HI (2)										8 Ω	
40/42-230-220-HI (4) 40/42-230-320-HI (2)										0.125 Ω	
40/42-230-221-HI (4) 40/42-230-321-HI (2)										0.25 Ω	
40/42-230-222-HI (4) 40/42-230-322-HI (2)										0.5 Ω	
40/42-230-223-HI (4) 40/42-230-323-HI (2)										1 Ω	
40/42-230-224-HI (4) 40/42-230-324-HI (2)										2 Ω	
40/42-230-225-HI (4) 40/42-230-325-HI (2)										4 Ω	
40/42-230-226-HI (4) 40/42-230-326-HI (2)										8 Ω	
40/42-230-230-HI (2) 40/42-230-330-HI (1)										0.125 Ω	
40/42-230-231-HI (2) 40/42-230-331-HI (1)										0.25 Ω	
40/42-230-232-HI (2) 40/42-230-332-HI (1)										0.5 Ω	
40/42-230-233-HI (2) 40/42-230-333-HI (1)										1 Ω	
40/42-230-234-HI (2) 40/42-230-334-HI (1)										2 Ω	
40/42-230-235-HI (2) 40/42-230-335-HI (1)										4 Ω	
40/42-230-236-HI (2) 40/42-230-336-HI (1)										8 Ω	
40/42-230-240-HI (2) 40/42-230-340-HI (1)										0.125 Ω	
40/42-230-241-HI (2) 40/42-230-341-HI (1)										0.25 Ω	
40/42-230-242-HI (2) 40/42-230-342-HI (1)										0.5 Ω	
40/42-230-243-HI (2) 40/42-230-343-HI (1)										1 Ω	
40/42-230-244-HI (2) 40/42-230-344-HI (1)										2 Ω	
40/42-230-245-HI (2)										4 Ω	
40/42-230-246-HI (2)										8 Ω	
40/42-230-250-HI (2) 40/42-230-350-HI (1)										0.125 Ω	
40/42-230-251-HI (2) 40/42-230-351-HI (1)										0.25 Ω	
40/42-230-252-HI (2) 40/42-230-352-HI (1)										0.5 Ω	
40/42-230-253-HI (2) 40/42-230-353-HI (1)										1 Ω	
40/42-230-254-HI (2) 40/42-230-354-HI (1)										2 Ω	
40/42-230-255-HI (2)										4 Ω	
40/42-230-256-HI (2)										8 Ω	

40/42-230 High Voltage Resistor Module Range - 1.2 kV versions with 22-pin REDEL connector



40-230 High Voltage Resistor
Module With REDEL Connector

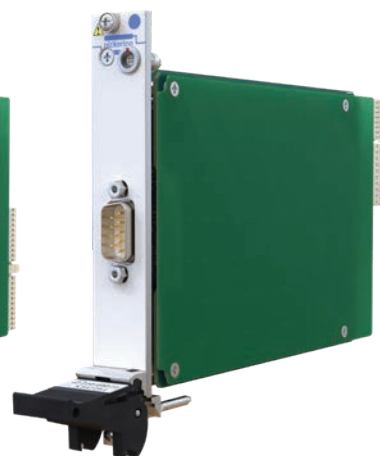

42-230 High Voltage Resistor
Module in PXIe Format

Specifications

Accuracy (low power):	$< 30 \Omega$: $\pm 0.5 \Omega$ $\pm$ Resolution $\geq 30 \Omega$ & $< 300 \Omega$: $\pm 3 \%$ $\pm$ Resolution $\geq 300 \Omega$: $\pm 0.3 \%$ $\pm$ Resolution @ $\pm 10^\circ\text{C}$ from calibration temperature (factory calibration @ 21°C)
Fault Simulation:	Open and short circuit (typically $< 0.35 \Omega$)
Power:	1 W maximum per channel †
Maximum Current:	0.7 A or as limited by power
Maximum Voltage:	9-pin D-type connector versions: 1 kV * or as limited by power 22-pin REDEL connector versions: 1.2 kV * or as limited by power
Settling Time:	0.5 ms $\pm$ (typical)
Thermal Offset:	30 μV
Number of Operations:	1×10^8 (low power), 1×10^6 (high power)
Software Control:	By resistance calls to module for selected channel.
Calibration:	4-wire resistance measurement of selected channel for verification purposes with UUT removed and a special cable assembly attached. Factory calibration data is stored in the module.

* For full voltage rating, signal sources must be fully isolated from mains supply and safety earth.

† Or as limited by voltage/current.

‡ The total operate time when setting a resistance may be longer depending upon the change requested due to relay sequencing.

Power Requirements - 40-230

+3.3 V	+5 V	+12 V	-12 V
165 mA	2 A	0	0

Power Requirements - 42-230

+3.3 V	+12 V
400 mA	1 A

Mechanical Characteristics

40-230 - Single slot 3U PXI (CompactPCI card).

42-230 - Single slot 3U PXIe, compatible with PXIe hybrid slot.

Module weight: 270g

3D models for all versions in a variety of popular file formats are available on request.

Connectors

40-230 - PXI bus via 32-bit P1/J1 backplane connector.

42-230 - PXIe bus via XJ3 and XJ4 backplane connectors.

Resistor channel signals via front panel connector:

- 1 kV versions - 9-pin male D-type high voltage connector
- 1.2 kV versions - 22-pin female REDEL high voltage connector

Hardware interlock connections via 1 x 4-pin female 00 series (mating half supplied with module, to be wired by end user).

Operating/Storage Conditions

Operating Temperature:	0 $^\circ\text{C}$ to +55 $^\circ\text{C}$
Humidity:	Up to 90 % non-condensing
Altitude:	5000 m
Storage/Transport Temperature:	-20 $^\circ\text{C}$ to +75 $^\circ\text{C}$
Humidity:	Up to 90 % non-condensing
Altitude:	15000 m

PXI Product Order Codes - 1 kV versions with 9-pin D-type connector

0.125 Ω Resolution

Range	Ch. Order Code	Ch. Order Code
2.5 Ω to 31.5 Ω	2 40-230-110-HI-CC	4 40-230-010-HI-CC
3 Ω to 472 Ω	2 40-230-120-HI-CC	4 40-230-020-HI-CC
3.5 Ω to 6.97 k Ω	1 40-230-130-HI-CC	2 40-230-030-HI-CC
4 Ω to 102 k Ω	1 40-230-140-HI-CC	2 40-230-040-HI-CC
4.5 Ω to 1.5 M Ω	1 40-230-150-HI-CC	2 40-230-050-HI-CC

0.25 Ω Resolution

Range	Ch. Order Code	Ch. Order Code
2.5 Ω to 62.1 Ω	2 40-230-111-HI-CC	4 40-230-011-HI-CC
3 Ω to 925 Ω	2 40-230-121-HI-CC	4 40-230-021-HI-CC
3.5 Ω to 13.6 k Ω	1 40-230-131-HI-CC	2 40-230-031-HI-CC
4 Ω to 201 k Ω	1 40-230-141-HI-CC	2 40-230-041-HI-CC
4.5 Ω to 2.95 M Ω	1 40-230-151-HI-CC	2 40-230-051-HI-CC

0.5 Ω Resolution

Range	Ch. Order Code	Ch. Order Code
2.5 Ω to 122 Ω	2 40-230-112-HI-CC	4 40-230-012-HI-CC
3 Ω to 1.81 k Ω	2 40-230-122-HI-CC	4 40-230-022-HI-CC
3.5 Ω to 26.7 k Ω	1 40-230-132-HI-CC	2 40-230-032-HI-CC
4 Ω to 392 k Ω	1 40-230-142-HI-CC	2 40-230-042-HI-CC
4.5 Ω to 5.762 M Ω	1 40-230-152-HI-CC	2 40-230-052-HI-CC

1 Ω Resolution

Range	Ch. Order Code	Ch. Order Code
2.5 Ω to 239 Ω	2 40-230-113-HI-CC	4 40-230-013-HI-CC
3 Ω to 3.55 k Ω	2 40-230-123-HI-CC	4 40-230-023-HI-CC
3.5 Ω to 52.4 k Ω	1 40-230-133-HI-CC	2 40-230-033-HI-CC
4 Ω to 770 k Ω	1 40-230-143-HI-CC	2 40-230-043-HI-CC
4.5 Ω to 11.32 M Ω	1 40-230-153-HI-CC	2 40-230-053-HI-CC

2 Ω Resolution

Range	Ch. Order Code	Ch. Order Code
2.5 Ω to 470 Ω	2 40-230-114-HI-CC	4 40-230-014-HI-CC
3 Ω to 6.97 k Ω	2 40-230-124-HI-CC	4 40-230-024-HI-CC
3.5 Ω to 102 k Ω	1 40-230-134-HI-CC	2 40-230-034-HI-CC
4 Ω to 1.5 M Ω	1 40-230-144-HI-CC	2 40-230-044-HI-CC
4.5 Ω to 22.05 M Ω	1 40-230-154-HI-CC	2 40-230-054-HI-CC

4 Ω Resolution

Range	Ch. Order Code	Ch. Order Code
2.5 Ω to 925 Ω	2 40-230-115-HI-CC	4 40-230-015-HI-CC
3 Ω to 13.6 k Ω	2 40-230-125-HI-CC	4 40-230-025-HI-CC
3.5 Ω to 201 k Ω	1 40-230-135-HI-CC	2 40-230-035-HI-CC
4 Ω to 2.954 M Ω	1 40-230-145-HI-CC	2 40-230-045-HI-CC
4.5 Ω to 43.424 M Ω	1 40-230-155-HI-CC	2 40-230-055-HI-CC

8 Ω Resolution

Range	Ch. Order Code	Ch. Order Code
2.5 Ω to 1.8 k Ω	2 40-230-116-HI-CC	4 40-230-016-HI-CC
3 Ω to 26.7 k Ω	2 40-230-126-HI-CC	4 40-230-026-HI-CC
3.5 Ω to 395 k Ω	1 40-230-136-HI-CC	2 40-230-036-HI-CC
4 Ω to 5.806 M Ω	1 40-230-146-HI-CC	2 40-230-046-HI-CC
4.5 Ω to 76.8 M Ω	1 40-230-156-HI-CC	2 40-230-056-HI-CC

PXIe Product Order Codes - 1 kV versions with 9-pin D-type connector

0.125 Ω Resolution

Range	Ch. Order Code	Ch. Order Code
2.5 Ω to 31.5 Ω	2 42-230-110-HI-CC	4 42-230-010-HI-CC
3 Ω to 472 Ω	2 42-230-120-HI-CC	4 42-230-020-HI-CC
3.5 Ω to 6.97 k Ω	1 42-230-130-HI-CC	2 42-230-030-HI-CC
4 Ω to 102 k Ω	1 42-230-140-HI-CC	2 42-230-040-HI-CC
4.5 Ω to 1.5 M Ω	1 42-230-150-HI-CC	2 42-230-050-HI-CC

0.25 Ω Resolution

Range	Ch. Order Code	Ch. Order Code
2.5 Ω to 62.1 Ω	2 42-230-111-HI-CC	4 42-230-011-HI-CC
3 Ω to 925 Ω	2 42-230-121-HI-CC	4 42-230-021-HI-CC
3.5 Ω to 13.6 k Ω	1 42-230-131-HI-CC	2 42-230-031-HI-CC
4 Ω to 201 k Ω	1 42-230-141-HI-CC	2 42-230-041-HI-CC
4.5 Ω to 2.95 M Ω	1 42-230-151-HI-CC	2 42-230-051-HI-CC

0.5 Ω Resolution

Range	Ch. Order Code	Ch. Order Code
2.5 Ω to 122 Ω	2 42-230-112-HI-CC	4 42-230-012-HI-CC
3 Ω to 1.81 k Ω	2 42-230-122-HI-CC	4 42-230-022-HI-CC
3.5 Ω to 26.7 k Ω	1 42-230-132-HI-CC	2 42-230-032-HI-CC
4 Ω to 392 k Ω	1 42-230-142-HI-CC	2 42-230-042-HI-CC
4.5 Ω to 5.762 M Ω	1 42-230-152-HI-CC	2 42-230-052-HI-CC

1 Ω Resolution

Range	Ch. Order Code	Ch. Order Code
2.5 Ω to 239 Ω	2 42-230-113-HI-CC	4 42-230-013-HI-CC
3 Ω to 3.55 k Ω	2 42-230-123-HI-CC	4 42-230-023-HI-CC
3.5 Ω to 52.4 k Ω	1 42-230-133-HI-CC	2 42-230-033-HI-CC
4 Ω to 770 k Ω	1 42-230-143-HI-CC	2 42-230-043-HI-CC
4.5 Ω to 11.32 M Ω	1 42-230-153-HI-CC	2 42-230-053-HI-CC

2 Ω Resolution

Range	Ch. Order Code	Ch. Order Code
2.5 Ω to 470 Ω	2 42-230-114-HI-CC	4 42-230-014-HI-CC
3 Ω to 6.97 k Ω	2 42-230-124-HI-CC	4 42-230-024-HI-CC
3.5 Ω to 102 k Ω	1 42-230-134-HI-CC	2 42-230-034-HI-CC
4 Ω to 1.5 M Ω	1 42-230-144-HI-CC	2 42-230-044-HI-CC
4.5 Ω to 22.05 M Ω	1 42-230-154-HI-CC	2 42-230-054-HI-CC

4 Ω Resolution

Range	Ch. Order Code	Ch. Order Code
2.5 Ω to 925 Ω	2 42-230-115-HI-CC	4 42-230-015-HI-CC
3 Ω to 13.6 k Ω	2 42-230-125-HI-CC	4 42-230-025-HI-CC
3.5 Ω to 201 k Ω	1 42-230-135-HI-CC	2 42-230-035-HI-CC
4 Ω to 2.954 M Ω	1 42-230-145-HI-CC	2 42-230-045-HI-CC
4.5 Ω to 43.424 M Ω	1 42-230-155-HI-CC	2 42-230-055-HI-CC

8 Ω Resolution

Range	Ch. Order Code	Ch. Order Code
2.5 Ω to 1.8 k Ω	2 42-230-116-HI-CC	4 42-230-016-HI-CC
3 Ω to 26.7 k Ω	2 42-230-126-HI-CC	4 42-230-026-HI-CC
3.5 Ω to 395 k Ω	1 42-230-136-HI-CC	2 42-230-036-HI-CC
4 Ω to 5.806 M Ω	1 42-230-146-HI-CC	2 42-230-046-HI-CC
4.5 Ω to 76.8 M Ω	1 42-230-156-HI-CC	2 42-230-056-HI-CC

PXI Product Order Codes - 1.2 kV versions with 22-pin REDEL connector

0.125 Ω Resolution

Range	Chan.	Order Code	Chan.	Order Code
2.5 Ω to 31.5 Ω	2	40-230-310-HI	4	40-230-210-HI
3 Ω to 472 Ω	2	40-230-320-HI	4	40-230-220-HI
3.5 Ω to 6.97 k Ω	1	40-230-330-HI	2	40-230-230-HI
4 Ω to 102 k Ω	1	40-230-340-HI	2	40-230-240-HI
4.5 Ω to 1.5 M Ω	1	40-230-350-HI	2	40-230-250-HI

0.25 Ω Resolution

Range	Chan.	Order Code	Chan.	Order Code
2.5 Ω to 62.1 Ω	2	40-230-311-HI	4	40-230-211-HI
3 Ω to 925 Ω	2	40-230-321-HI	4	40-230-221-HI
3.5 Ω to 13.6 k Ω	1	40-230-331-HI	2	40-230-231-HI
4 Ω to 201 k Ω	1	40-230-341-HI	2	40-230-241-HI
4.5 Ω to 2.95 M Ω	1	40-230-351-HI	2	40-230-251-HI

0.5 Ω Resolution

Range	Chan.	Order Code	Chan.	Order Code
2.5 Ω to 122 Ω	2	40-230-312-HI	4	40-230-212-HI
3 Ω to 1.81 k Ω	2	40-230-322-HI	4	40-230-222-HI
3.5 Ω to 26.7 k Ω	1	40-230-332-HI	2	40-230-232-HI
4 Ω to 392 k Ω	1	40-230-342-HI	2	40-230-242-HI
4.5 Ω to 5.762 M Ω	1	40-230-352-HI	2	40-230-252-HI

1 Ω Resolution

Range	Chan.	Order Code	Chan.	Order Code
2.5 Ω to 239 Ω	2	40-230-313-HI	4	40-230-213-HI
3 Ω to 3.55 k Ω	2	40-230-323-HI	4	40-230-223-HI
3.5 Ω to 52.4 k Ω	1	40-230-333-HI	2	40-230-233-HI
4 Ω to 770 k Ω	1	40-230-343-HI	2	40-230-243-HI
4.5 Ω to 11.32 M Ω	1	40-230-353-HI	2	40-230-253-HI

2 Ω Resolution

Range	Chan.	Order Code	Chan.	Order Code
2.5 Ω to 470 Ω	2	40-230-314-HI	4	40-230-214-HI
3 Ω to 6.97 k Ω	2	40-230-324-HI	4	40-230-224-HI
3.5 Ω to 102 k Ω	1	40-230-334-HI	2	40-230-234-HI
4 Ω to 1.5 M Ω	1	40-230-344-HI	2	40-230-244-HI
4.5 Ω to 22.05 M Ω	1	40-230-354-HI	2	40-230-254-HI

4 Ω Resolution

Range	Chan.	Order Code	Chan.	Order Code
2.5 Ω to 925 Ω	2	40-230-315-HI	4	40-230-215-HI
3 Ω to 13.6 k Ω	2	40-230-325-HI	4	40-230-225-HI
3.5 Ω to 201 k Ω	1	40-230-335-HI	2	40-230-235-HI
4 Ω to 2.954 M Ω	1	40-230-345-HI	2	40-230-245-HI
4.5 Ω to 43.424 M Ω	1	40-230-355-HI	2	40-230-255-HI

8 Ω Resolution

Range	Chan.	Order Code	Chan.	Order Code
2.5 Ω to 1.8 k Ω	2	40-230-316-HI	4	40-230-216-HI
3 Ω to 26.7 k Ω	2	40-230-326-HI	4	40-230-226-HI
3.5 Ω to 395 k Ω	1	40-230-336-HI	2	40-230-236-HI
4 Ω to 5.806 M Ω	1	40-230-346-HI	2	40-230-246-HI
4.5 Ω to 76.8 M Ω	1	40-230-356-HI	2	40-230-256-HI

PXle Product Order Codes - 1.2 kV versions with 22-pin REDEL connector

0.125 Ω Resolution

Range	Chan.	Order Code	Chan.	Order Code
2.5 Ω to 31.5 Ω	2	42-230-310-HI	4	42-230-210-HI
3 Ω to 472 Ω	2	42-230-320-HI	4	42-230-220-HI
3.5 Ω to 6.97 k Ω	1	42-230-330-HI	2	42-230-230-HI
4 Ω to 102 k Ω	1	42-230-340-HI	2	42-230-240-HI
4.5 Ω to 1.5 M Ω	1	42-230-350-HI	2	42-230-250-HI

0.25 Ω Resolution

Range	Chan.	Order Code	Chan.	Order Code
2.5 Ω to 62.1 Ω	2	42-230-311-HI	4	42-230-211-HI
3 Ω to 925 Ω	2	42-230-321-HI	4	42-230-221-HI
3.5 Ω to 13.6 k Ω	1	42-230-331-HI	2	42-230-231-HI
4 Ω to 201 k Ω	1	42-230-341-HI	2	42-230-241-HI
4.5 Ω to 2.95 M Ω	1	42-230-351-HI	2	42-230-251-HI

0.5 Ω Resolution

Range	Chan.	Order Code	Chan.	Order Code
2.5 Ω to 122 Ω	2	42-230-312-HI	4	42-230-212-HI
3 Ω to 1.81 k Ω	2	42-230-322-HI	4	42-230-222-HI
3.5 Ω to 26.7 k Ω	1	42-230-332-HI	2	42-230-232-HI
4 Ω to 392 k Ω	1	42-230-342-HI	2	42-230-242-HI
4.5 Ω to 5.762 M Ω	1	42-230-352-HI	2	42-230-252-HI

1 Ω Resolution

Range	Chan.	Order Code	Chan.	Order Code
2.5 Ω to 239 Ω	2	42-230-313-HI	4	42-230-213-HI
3 Ω to 3.55 k Ω	2	42-230-323-HI	4	42-230-223-HI
3.5 Ω to 52.4 k Ω	1	42-230-333-HI	2	42-230-233-HI
4 Ω to 770 k Ω	1	42-230-343-HI	2	42-230-243-HI
4.5 Ω to 11.32 M Ω	1	42-230-353-HI	2	42-230-253-HI

2 Ω Resolution

Range	Chan.	Order Code	Chan.	Order Code
2.5 Ω to 470 Ω	2	42-230-314-HI	4	42-230-214-HI
3 Ω to 6.97 k Ω	2	42-230-324-HI	4	42-230-224-HI
3.5 Ω to 102 k Ω	1	42-230-334-HI	2	42-230-234-HI
4 Ω to 1.5 M Ω	1	42-230-344-HI	2	42-230-244-HI
4.5 Ω to 22.05 M Ω	1	42-230-354-HI	2	42-230-254-HI

4 Ω Resolution

Range	Chan.	Order Code	Chan.	Order Code
2.5 Ω to 925 Ω	2	42-230-315-HI	4	42-230-215-HI
3 Ω to 13.6 k Ω	2	42-230-325-HI	4	42-230-225-HI
3.5 Ω to 201 k Ω	1	42-230-335-HI	2	42-230-235-HI
4 Ω to 2.954 M Ω	1	42-230-345-HI	2	42-230-245-HI
4.5 Ω to 43.424 M Ω	1	42-230-355-HI	2	42-230-255-HI

8 Ω Resolution

Range	Chan.	Order Code	Chan.	Order Code
2.5 Ω to 1.8 k Ω	2	42-230-316-HI	4	42-230-216-HI
3 Ω to 26.7 k Ω	2	42-230-326-HI	4	42-230-226-HI
3.5 Ω to 395 k Ω	1	42-230-336-HI	2	42-230-236-HI
4 Ω to 5.806 M Ω	1	42-230-346-HI	2	42-230-246-HI
4.5 Ω to 76.8 M Ω	1	42-230-356-HI	2	42-230-256-HI

Support Products

Mating Connectors & Cabling

For a complete list of connection accessories and documentation for the 40/42-230 module please refer to our [9-pin High Voltage D-type datasheet \(90-003HVD\)](#) and [22-pin High Voltage REDEL datasheet \(90-025HVD\)](#)


Accessories - Interlock Connectors

These modules are supplied with a mating connector for the hardware interlock function, spare/replacement connectors can be ordered as follows:

Connector with internal link 44-961-040

Connector only, no internal wiring
(replacing that supplied with the module) 44-960-040



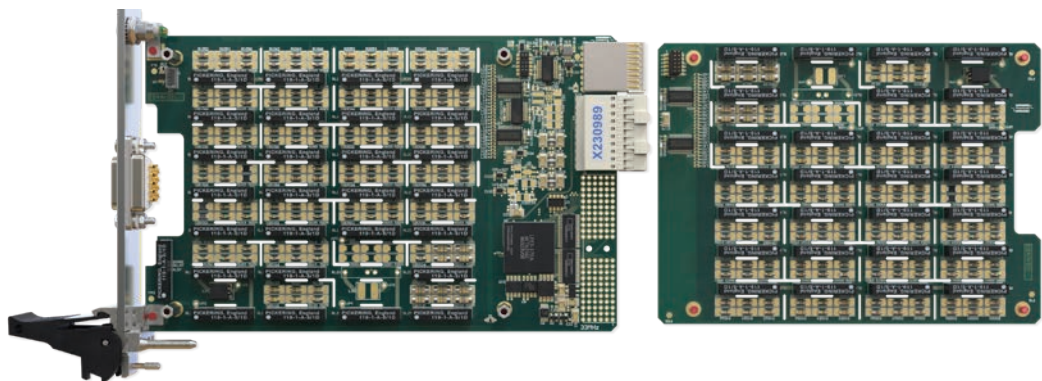

View showing Mother & Daughter cards of the High Voltage Resistor

Product Customization

Pickering modules are designed and manufactured on our own flexible manufacturing lines, giving complete product control and enabling simple customization to meet very specific requirements. Customization can include:

- Alternative resistance range
- Alternative resolution
- Different number of channels
- Different performance specifications

All customized products are given a unique part number, fully documented and may be ordered at any time in the future. Please contact your local sales office to discuss.

Other Resistor Modules

Pickering Interfaces manufacture a range of variable resistor modules in PXI and PXLe format. If you have a requirement for a variable resistor module please contact your local sales office with the information below and we will advise you on the best solution for your application.

Lowest Resistance †	
Highest Resistance	
Resistance Resolution	
Overall Accuracy	
Maximum Power/Current	
Number of Channels (variable resistors)	

† Resistance is as measured across the user connector terminals, minimum resistance must have a non-zero value.

PXI & CompactPCI Compliance - 40-230

The module is compliant with the PXI Specification 2.2. Local Bus, Trigger Bus and Star Trigger are not implemented.
Uses a 33 MHz 32-bit backplane interface.

PXLe Compliance - 42-230

The module is compliant with the PXLe Specification 1.0. Local Bus, Trigger Bus & Star Trigger are not implemented.

Safety & CE Compliance


All modules are fully CE compliant and meet applicable EU directives:
Low-voltage safety EN61010-1:2010,
EMC Immunity EN61326-1:2013,
Emissions EN55011:2009+A1:2010.

The 40/42-230 is part of a range of Programmable Resistor Modules suitable for simulation applications.

For applications requiring greater resolution (to <2 m Ω) or better accuracy (to <0.03 %), look to our Precision Resistor range which includes models 40-260, 40-261, 40-262, 40-265, and 40/42-297A

Pickering's Range of PXI/PXIe Programmable Resistor Modules

Resistor Type	Channels	Range	Model No.
High Voltage Programmable (up to 1.2 kV)	1, 2 or 4	Up to 76.8 M Ω	40/42-230
2.5 W Programmable	1, 2, 4 or 8	Up to 22.3 M Ω	40-251
5 W Programmable	1, 2, or 4	Up to 22.3 M Ω	40-252
10 W Programmable	1 or 2	Up to 102 k Ω	40-253
15 W Programmable	1 or 2	Up to 395 k Ω	40/42-254
Fixed Value Selectable	24 or 48	User specified	40-280
Dual Selectable	12 or 24	User specified	40-281
Fixed Potential Divider	12 or 24	User specified	40-282
Programmable with Relay Option	2	0.5 Ω to 32 k Ω	40-290
Programmable with Relay Option	4	0.5 Ω to 128 Ω	40-291
15W Programmable Load	1	40 Ω to 295 Ω , 10 Ω to 2.56 k Ω	40-292
Programmable with EMR Relays	2 or 4	Up to 131 k Ω	40-293
Programmable with Reed Relays	2 or 4	Up to 131 k Ω	40-294
High Density Programmable	3, 5, 6, 10 or 18	Up to 16 M Ω	40-295
Programmable Potentiometer	1, 2, 3, 4, 5 or 9	Up to 16 M Ω	40-296

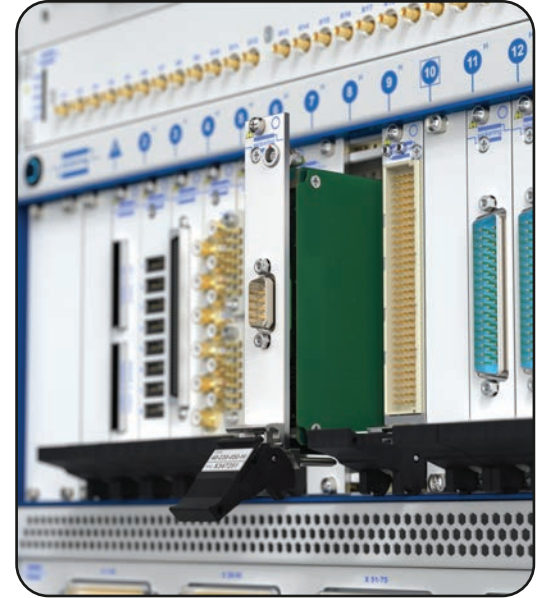

Chassis Compatibility

The PXI versions of this module are compatible with the following chassis types:

- All chassis conforming to the 3U PXI and 3U Compact PCI (cPCI) specification
- Legacy and Hybrid Peripheral slots in a 3U PXI Express (PXIe) chassis
- Pickering Interfaces LXI or LXI/USB Modular Chassis

The PXIe versions of this module are compatible with the following chassis types:

- All chassis conforming to the 3U PXIe specification
- PXIe and Hybrid Peripheral slots in a 3U PXI Express (PXIe) chassis

Chassis Selection Guide

PXI and PXIe (with PXIe and/or Hybrid slots) Chassis from any Vendor:

- Mix our 1000+ PXI/PXIe switching & simulation modules with any vendor's PXI/PXIe instrumentation
- Embedded or remote Windows PC control
- Real-time Operating System Support
- High data bandwidths, especially with PXI Express
- Integrated module timing and synchronization



Pickering LXI or LXI/USB Modular Chassis Only accept our PXI Switching & Simulation Modules:

- Choose from 1000+ Pickering PXI Modules
- Ethernet or USB control enables remote operation
- Low-cost control from practically any controller
- LXI provides manual control via Web browsers
- Driverless software support
- Power sequencing immunity
- Ethernet provides chassis/controller voltage isolation
- Independence from Windows operating system



Connectivity Solutions


We provide a full range of supporting cable and connector solutions for all our switching products—20 connector families with **1200+** products. We offer everything from simple mating connectors to complex cables assemblies and terminal blocks. All assemblies are manufactured by Pickering and are guaranteed to mechanically and electrically mate to our modules. These accessories are detailed in Connector Accessories data sheets, where a complete list and documentation can be found for each accessory.



Connectors
& Backshells



Multi-way
Cable Assemblies



RF Cable
Assemblies




Breakouts



Connector
Blocks

We also offer customized cabling and have a free online **Cable Design Tool** that can be used to create custom cable solutions for many applications.

- Fully supported on modern browsers and tablet operating systems.
- Built-in tutorials and videos allow you to get quickly up to speed.
- Store cable assemblies in the Cloud and develop over time.
- Each cable design has a downloadable PDF documentation file detailing all specifications

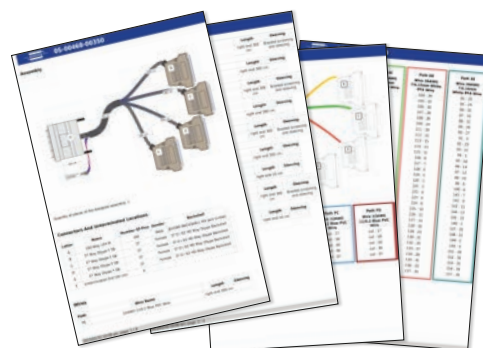

Start designing your custom cabling, go to pickeringtest.com/cdt


Mass Interconnect

We recommend the use of a mass interconnect solution when an Interchangeable Test Adapter (ITA) is required for PXI/LXI based test systems. Our modules are fully supported by Virginia Panel and MacPanel.

Pickering Reed Relays

We are the only switch provider with in-house reed relay manufacturing capability via our Relay Division. These instrument grade reed relays feature **SoftCenter™** technology, ensuring long service life and repeatable contact performance.

To learn more go to pickeringrelay.com

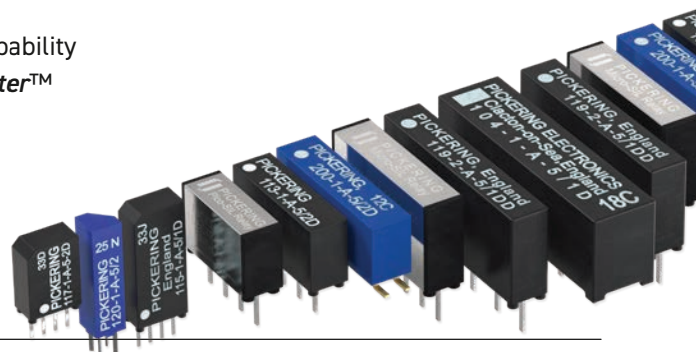

Programming

Pickering provide kernel, IVI and VISA (NI & Keysight) drivers which are compatible with all Microsoft supported versions of Windows and popular older versions.

For more information go to pickeringtest.com/os

The VISA driver support is provided for LabVIEW Real Time Operating Systems (Pharlap and Linux-RT). For other RTOS support contact Pickering. These drivers may be used with a variety of programming environments and applications including:

- **Pickering Interfaces Switch Path Manager**
- **National Instruments** products (LabVIEW, LabWindows/CVI, Switch Executive, MAX, TestStand, VeriStand, etc.)
- **Microsoft Visual Studio** products (Visual Basic, Visual C++)
- **Programming Languages** C, C++, C#, Python
- **Keysight VEE** and **OpenTAP**
- **Mathworks MATLAB, Simulink**
- **Marvin ATEasy**
- **MTQ Testsolutions** Tecap Test & Measurement Suite


Drivers for popular Linux distributions are available, other environments are also supported, please contact Pickering with specific enquiries. We provide Soft Front Panels (SFPs) for our products for familiarity and manual control, as well as comprehensive documentation and example programs to help you develop test routines with ease.

To learn more about software drivers and development environments go to pickeringtest.com/software

Signal Routing Software

Our signal routing software, Switch Path Manager, automatically selects and energizes switch paths through Pickering switching systems. Signal routing is performed by simply defining test system endpoints to be connected together, greatly accelerating Test System software development.

To learn more go to pickeringtest.com/spm

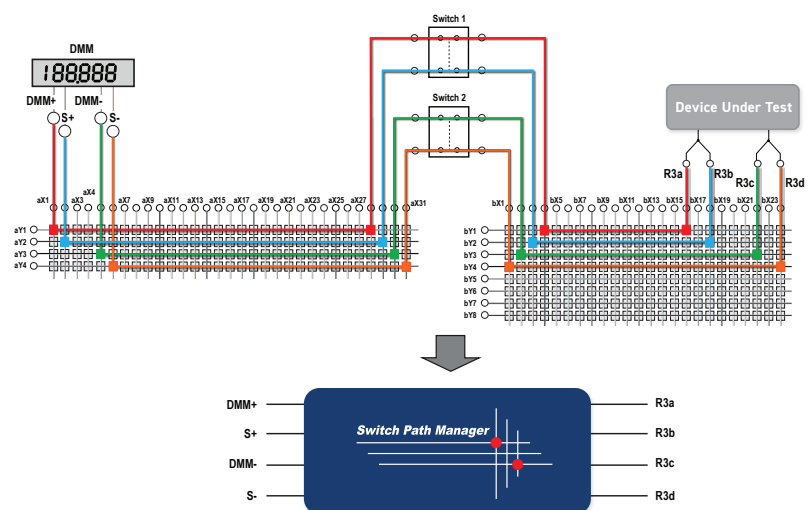

Diagnostic Relay Test Tools

eBIRST Switching System Test Tools are designed specifically for our PXI, PCI or LXI products, these tools simplify switching system fault-finding by quickly testing the system and graphically identifying the faulty relay.

To learn more go to pickeringtest.com/ebirst



Three Year Warranty & Guaranteed Long-Term Support

All standard products manufactured by Pickering Interfaces are warranted against defective materials and workmanship for three years from the date of delivery to the original purchaser. Extended warranty and service agreements are available with various levels for your requirements. Although we offer a 3-year warranty as standard, we also include guaranteed long-term support—with a history of supporting our products for typically 15-20 years.

To learn more go to pickeringtest.com/support

Available Product Resources

We have a library of resources including success stories, product and support videos, articles and white papers as well as application-specific brochures to assist you. We have also published reference books on switching technology and the PXI and LXI standards.

To view, download or request any of our product resources go to pickeringtest.com/resources

